


ED密封圈尺寸对照表

德标DIN 3869-1994

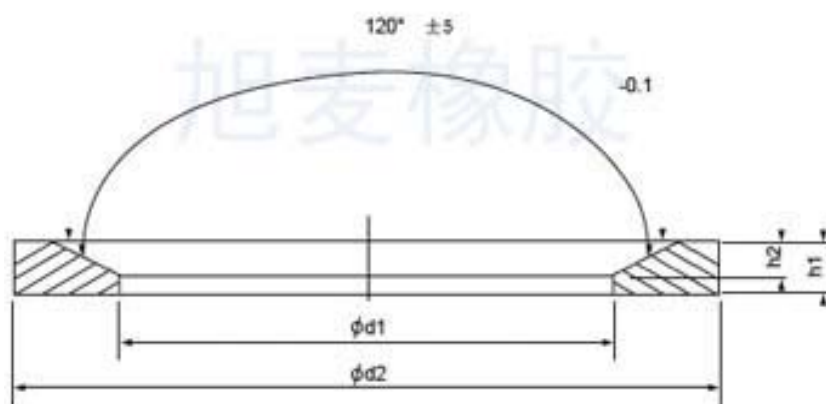

• 上海旭麦橡胶

部件号 Part NO.	内径 ID	外径 OD	厚度 T	厚度 T	公制螺纹 M	英制螺纹 Inch.
ED08	6.5	9.9	1	0.5	M8 x 1.0	---
ED10	8.4	11.9	1	0.5	M10 x 1.0	G 1/8 A
ED12	9.8	14.4	1.5	0.8	M12 x 1.5	---
ED14	11.6	16.5	1.5	0.8	M14 x 1.5	G 1/4 A
ED16	13.8	18.9	1.5	0.8	M16 x 1.5	---
ED17	14.7	18.9	1.5	0.8	M17 x 1.5	G 3/8 A
ED18	15.7	20.9	1.5	0.8	M18 x 1.5	---
ED20	17.8	22.9	1.5	0.8	M20 x 1.5	---
ED21	18.5	23.9	1.5	0.8	---	G 1/2 A
ED22	19.6	24.3	1.5	0.8	M22 x 1.5	---
ED26	23.9	29.2	1.5	0.8	M27 x 1.5	G 3/4 A
ED27	23.9	29.2	1.5	0.8	M27 x 2.0	G 3/4 A
ED30	26.7	32.7	2	1	M30 x 2.0	---
ED33	29.7	35.7	2	1	M33 x 2.0	G 1 A
ED36	32.7	38.7	2	1	M36 x 2.0	---
ED39	35.7	41.7	2	1	M39 x 2.0	---
ED42	38.8	45.8	2	1	M42 x 2.0	G1 1/4 A
ED48	44.7	50.7	2	1	M48 x 2.0	G1 1/2 A
ED50	50.4	56.7	2.5	1.25	M50 x 2.0	G1 3/4 A
ED60	56.1	62.7	2.5	1.25	M60 x 2.0	G2 A

常用材料有：氟橡胶，丁腈橡胶，聚氨酯