


O型圈尺寸标示及公差标准表

—上海旭麦橡胶制品有限公司

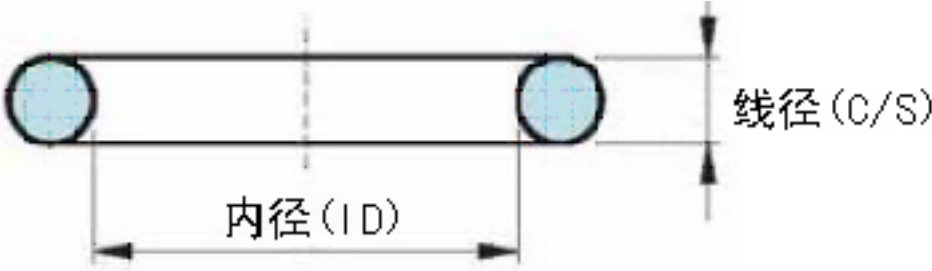

• 上海旭麦橡胶

GB3452.1-92

内径 (ID)		公差 (±)	线径 (C/S)		公差 (±)
0	— 1.79	0.10	0	— 1.79	0.07
1.80	— 6.29	0.13	1.80	— 2.64	0.08
6.30	— 10.59	0.14	2.65	— 3.54	0.09
10.60	— 18.99	0.17	3.55	— 5.29	0.10
19.00	— 31.49	0.22	5.30	— 6.99	0.13
31.50	— 41.19	0.30	7.00	— 8.00	0.15
41.20	— 51.49	0.36	8.01	— 10.00	0.20
51.50	— 64.99	0.44	10.01	— 15.00	0.25
65.00	— 82.49	0.53	15.01	— 25.00	0.35
82.50	— 121.99	0.65	25.01	— 100.00	0.45
122.00	— 184.99	0.90			
185.00	— 257.99	1.20			
258.00	— 324.99	1.60			
325.00	— 411.99	2.10			
412.00	— 514.99	2.60			
515.00	— 649.99	3.20			
650.00	— 670.00	4.00			
670.01	— 999.00	5.00			
999.01	— 1200.00	6.00			
1200.01	— 1500.00	7.00			
1500.01	— 1800.00	8.00			
1800.01	— 2000.00	9.00			