

Yx型轴用密封圈标准尺寸表-JB/ZQ4265-97

P1

标准来源：上海旭麦橡胶制品有限公司

产品编号	密封圈公称尺寸			
Serial NO:	d内径	D外径	B壁厚	H高度
YX-d6	6	11	2.5	8
YX-d6	6	12	3	8
YX-d8	8	14	3	8
YX-d10	10	16	3	8
YX-d12	12	18	3	8
YX-d14	14	20	3	8
YX-d16	16	22	3	8
YX-d18	18	24	3	8
YX-d20	20	26	3	8
YX-d20	20	28	4	10
YX-d22	22	28	3	8
YX-d22	22	30	4	10
YX-d25	25	31	3	8
YX-d25	25	33	4	10
YX-d28	28	34	3	8
YX-d28	28	36	4	10
YX-d30	30	38	4	10
YX-d32	32	40	4	10
YX-d34	34	42	4	10
YX-d35	35	43	4	10
YX-d36	36	44	4	10
YX-d40	40	48	4	10
YX-d45	45	53	4	10
YX-d50	50	58	4	10
YX-d52	52	60	4	10
YX-d55	55	63	4	10
YX-d60	60	72	6	14
YX-d63	63	75	6	14
YX-d65	65	77	6	14
YX-d70	70	82	6	14
YX-d72	72	84	6	14
YX-d75	75	87	6	14
YX-d80	80	92	6	14
YX-d85	85	97	6	14
YX-d86	86	98	6	14
YX-d88	88	100	6	14
YX-d90	90	102	6	14
YX-d95	95	107	6	14
YX-d100	100	112	6	14

产品编号	密封圈公称尺寸			
Serial NO:	d内径	D外径	B壁厚	H高度
YX-d105	105	117	6	14
YX-d105	105	121	8	18
YX-d110	110	122	6	14
YX-d110	110	126	8	18
YX-d115	115	127	6	14
YX-d115	115	131	8	18
YX-d120	120	132	6	14
YX-d120	120	136	8	18
YX-d125	125	137	6	14
YX-d125	125	141	8	18
YX-d130	130	142	6	14
YX-d130	130	146	8	18
YX-d135	135	151	6	14
YX-d135	135	151	8	18
YX-d140	140	152	6	14
YX-d140	140	156	8	18
YX-d145	145	157	6	14
YX-d145	145	161	8	18
YX-d150	150	166	8	18
YX-d150	150	162	6	14
YX-d155	155	167	6	14
YX-d155	155	171	8	18
YX-d160	160	172	6	14
YX-d160	160	176	8	18
YX-d170	170	186	8	18
YX-d180	180	196	8	18
YX-d185	185	201	8	18
YX-d190	190	206	8	18
YX-d195	195	211	8	18
YX-d200	200	216	8	18
YX-d205	205	221	8	18
YX-d210	210	226	8	18
YX-d215	215	231	8	18
YX-d220	220	236	8	18
YX-d225	225	241	8	18
YX-d230	230	246	8	18
YX-d235	235	251	8	18
YX-d240	240	256	8	18
YX-d250	250	266	8	18


Yx型轴用密封圈标准尺寸表-JB/ZQ4265-97

P2

标准来源：上海旭麦橡胶制品有限公司

产品编号	密封圈公称尺寸			
Serial NO:	d内径	D外径	B壁厚	H高度
YX-d260	260	276	8	18
YX-d265	265	281	8	18
YX-d270	270	286	8	18
YX-d280	280	296	8	18
YX-d290	290	306	8	18
YX-d295	295	311	8	18
YX-d300	300	316	8	18
YX-d310	310	334	12	24
YX-d315	315	339	12	24
YX-d320	320	344	12	24
YX-d325	325	349	12	24
YX-d340	340	364	12	24
YX-d360	360	384	12	24
YX-d380	380	404	12	24

产品编号	密封圈公称尺寸			
Serial NO:	d内径	D外径	B壁厚	H高度
YX-d400	400	424	12	24
YX-d420	420	444	12	24
YX-d450	450	474	12	24
YX-d465	465	489	12	24
YX-d470	470	494	12	24
YX-d480	480	504	12	24
YX-d500	500	524	12	24
YX-d520	520	544	12	24
YX-d530	530	554	12	24
YX-d560	560	584	12	24
YX-d600	600	624	12	24
YX-d630	630	654	12	24
YX-d650	650	674	12	24
YX-d750	750	774	12	24
YX-d900	900	924	12	24

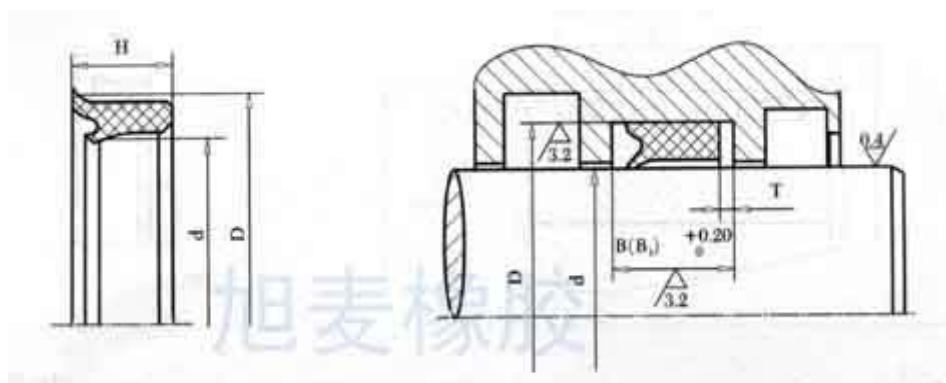

适用范围：各种液压缸，及高温，高压用油缸。

材料：聚氨酯（PU），丁腈橡胶（NBR），氟橡胶（FKM）

工作温度：PU：-40℃ ~ +120℃

工作压力：≤32Mpa (16Mpa-320Mpa用挡圈)

工作介质：液压油，乳化液，水

标准来源：JB/ZQ4265-97替代JB/ZQ4265-86 取代Q/ZB249-97